
AR10 Bolt Head Segments - Set of 3

https://armsco.fr/en/produit-20732-AR10-Bolt-Head-Segments-Set-of-3



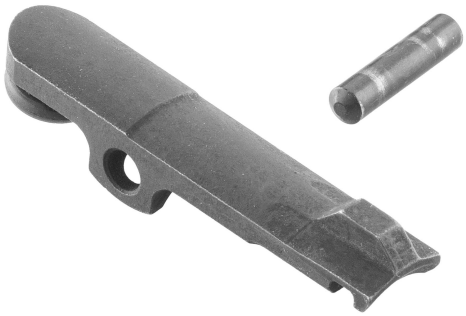

SKU	Designation	French Law	MSRP
YDB15-01	Complete extractor AR15 7.62X39	Vente libre	40.00 € incl. tax

Ensure reliable extraction of 7.62x39 caliber cases on your DB15 with this complete, ready-to-install extractor.

This complete extractor is specifically designed for Diamondback DB15 rifle bolts chambered in 7.62x39. It includes the machined extractor, spring, insert, O-ring, and retaining pin. Each component is calibrated to work perfectly with the specific pressures of the Russian caliber, ensuring consistent extraction even with steel or surplus cartridges.

- **Compatibility** : Diamondback DB15 7.62x39
- **Caliber** : 7.62x39 mm
- **Composition** :
- Treated steel extractor
- Spring + insert
- O-ring
- Retaining pin
- **Surface treatment** : Nitriding or phosphating (depending on batch)
- **Mounting** : Direct into the DB15 cylinder head
- **Standards** : Complies with specific AR 7.62 specifications

Function of a complete extractor

The extractor is responsible for removing the case from the chamber after firing. The spring, insert, and O-ring maintain a constant pressure adapted to the specific geometry of 7.62x39 cases. On DB15s, an improperly adapted extractor configuration can lead to incomplete extractions or even case ruptures.

Adaptation to 7.62x39 caliber

Unlike .223 extractors, this model features a **widened and reinforced claw profile** , specifically designed for the taper of 7.62 cases. It is also reinforced to withstand corrosion associated with varnished steel or military surplus ammunition.

Materials and durability

The extractor is machined from **high-strength steel** , heat-treated to maintain its elasticity and hardness despite fouling or high temperatures. The spring is coupled with a rigid insert and a high-density O-ring, ensuring firm retention even with low-pressure ammunition.

Maintenance and replacement

Recommended every 5,000 to 7,000 shots, this kit allows for rapid reconditioning of the bolt. Replacement is simple: remove the pin, insert the complete extractor, and replace the pin.

Les prix de vente conseillés sont mentionnés à titre indicatif. Les armuriers sont libres de vendre au prix qu'ils souhaitent. Textes et photos non contractuels, sujet à modification.